

The 2002 GEOTER Seismic Hazard Model for the Caribbean - Lesser Antilles

The GEOTER 2002 PSHA model for the Lesser Antilles was developed under the revision of the France seismic zonation including the overseas territories. The PSHA input model for the Lesser Antilles is described in the GEOTER Report ([Martin et al., 2002](#)). Here we present a short description of how this model was implemented in the OpenQuake-engine.

The Seismic Source Model

The seismic source model for the Lesser Antilles describes the major tectonic structures present in the region:

- The mainly left-lateral-strike-slip faults along the north-eastern Caribbean plate boundary,
- The subduction of the North American plate in the Caribbean ones in Lesser Antilles Arc,
- The large transform right-lateral-strike-slip faults along the south-eastern Caribbean plate boundary,
- The Lesser Antilles arc with:
 1. an extensional shear zone to the north,
 2. a transitional zone in the central part, with sinistral strike-slip deformation (between the Guadeloupe and Martinique islands), and
 3. a zone of dextral oblique compression to the south related with the accretion prism parallel to the arc,

In the original model the tectonic figures are defined as area sources. The crustal source zones were modelled with a 2D geometry at a fixed depth, while for the subduction ones a 3D geometry was used for both interface and intraslab source zones (see details in annex 3). In addition, an alternative subduction model was proposed by the authors, simplifying the geometry of several intraslab sources.

In the OpenQuake-engine implementation, the source model is implemented in a unique source model file in NRML format representing the different typology and tectonic region types defined in the original model. The shallow crustal seismicity are modeled as NRML [areaSource](#), while the subduction interface and intraslab faults are implemented as NRML [complexFaultSource](#) objects. The alternative subduction model have not been considered in the OpenQuake-engine implementation.

The map below depicts the annual occurrence rate per source (between minimum and maximum magnitudes) for the different source models included in the hazard model. Click the *show map layers* icon to view different source models and base layer maps.

Total occurrence rate
(number of events / year)

- < 1e-6

- 1e-6 - 1e-5
- 1e-5 - 1e-4
- 1e-4 - 1e-3
- 1e-3 - 1e-2
- 1e-2 - 1e-1
- 1e-1 - 1
- 1 - 10
- >= 10

```
.my-legend .legend-title { text-align: left; margin-bottom: 5px; font-weight: bold; font-size: 80%; }
.my-legend .legend-scale ul { margin: 0; margin-bottom: 5px; padding: 0; float: left; list-style: none; }
.my-legend .legend-scale ul li { font-size: 80%; list-style: none; margin-left: 0; line-height: 18px;
margin-bottom: 2px; } .my-legend ul.legend-labels li span { display: block; float: left; height: 16px;
width: 30px; margin-right: 5px; margin-left: 0; border: 1px solid #999; } .my-legend .legend-source {
font-size: 70%; color: #999; clear: both; } .my-legend a { color: #777; }
```

The Ground Motion Model

In the original model, three GMPEs related to the main tectonic regimes present in the region were used. A logic tree combined these GMPEs.

Active Shallow Crust	Weight
IPSN, 1999	0.5
Takahashi et al., 2000	0.5
Subduction Interface	Weight
Youngs et al., 1997	0.5
Takahashi et al., 2000	0.5
Subduction Intraslab	Weight
Youngs et al., 1997	0.5
Takahashi et al., 2000	0.5

In the OpenQuake-engine it was not possible to implement some of the GMPEs originally used by [GEOTER 2002](#) ([IPSN, 1999](#) and [Takahashi et al., 2000](#)). However, using well recognised GMPEs ([Zhao et al., 2006](#) and [Youngs et al., 1997](#)) the results show an acceptable agreement with the maps published in the [GEOTER 2002](#) report.


Active Shallow Crust	Weight
Zhao et al., 2006	1.0
Subduction Interface	Weight
Youngs et al., 1997	1.0
Subduction Intraslab	Weight
Youngs et al., 1997	1.0

Reference site condition

A rock condition is assumed in the OpenQuake-engine implementation. The site condition is defined using a $V_{s30} = 760$ m/s, which is equivalent to a rock condition site class in [Zhao et al. \(2006\)](#) and [Youngs et al., \(1997\)](#).

Hazard Results

The figure below is the hazard map for peak ground acceleration, for 10% probability of exceedance in 50 years, using the OpenQuake-engine. The calculations considered Zhao et al. (2006) for active shallow crust tectonic regimes and Youngs et al. (1997) otherwise.

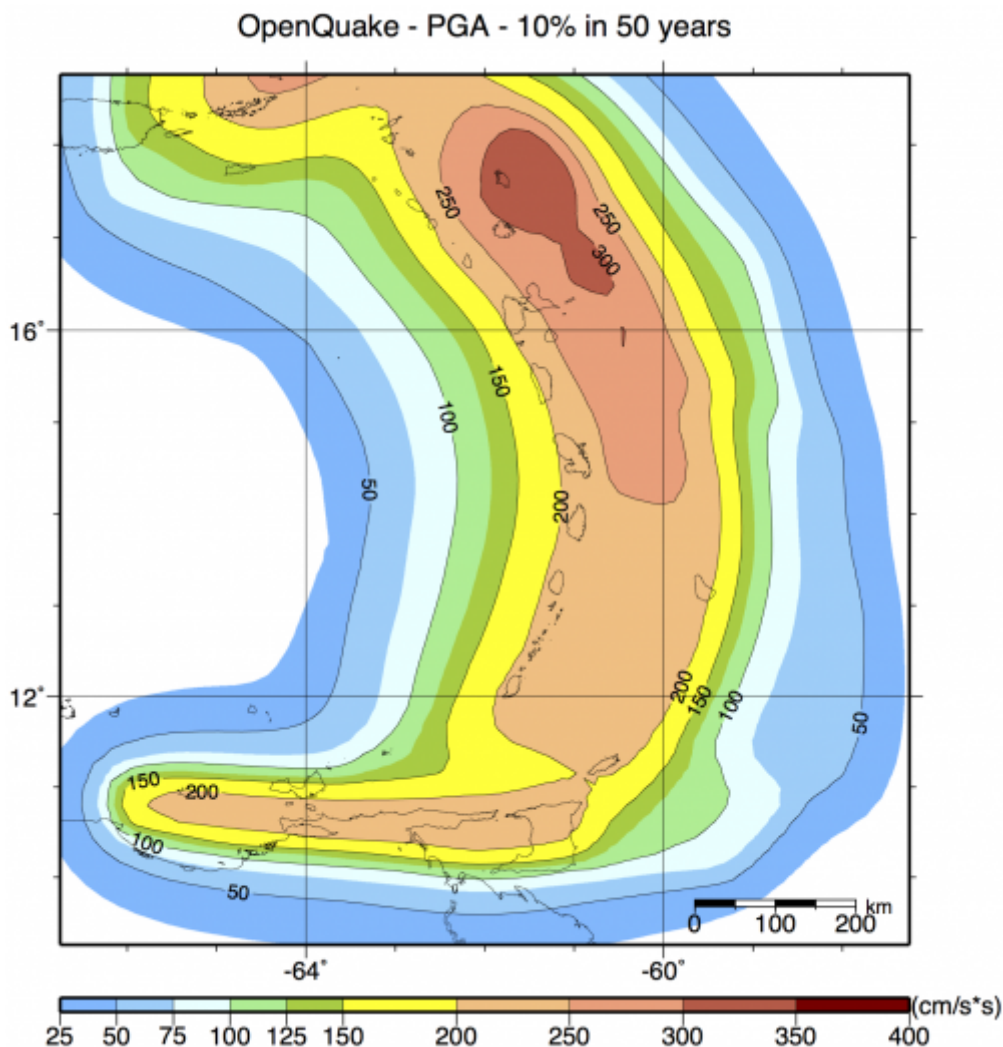


Comparison with GEOTER results

This is a preliminary model that does not have the same level of testing as other models implemented (i.e. USGS models) since in this specific case we did not have the original input model nor the results in an electronic format. In addition, as previously explained, we did not implement the GMPEs originally selected. However, the results show an acceptable agreement with the maps published in the [GEOTER 2002](#) report.

The figures below show hazard maps for 10% probability of exceedance in 50 years, for the Islands of Guadeloupe and Martinique, comparing results from the [GEOTER 2002](#) report (left) and the results computed with the OpenQuake-engine (right).


Archipel de la Guadeloupe

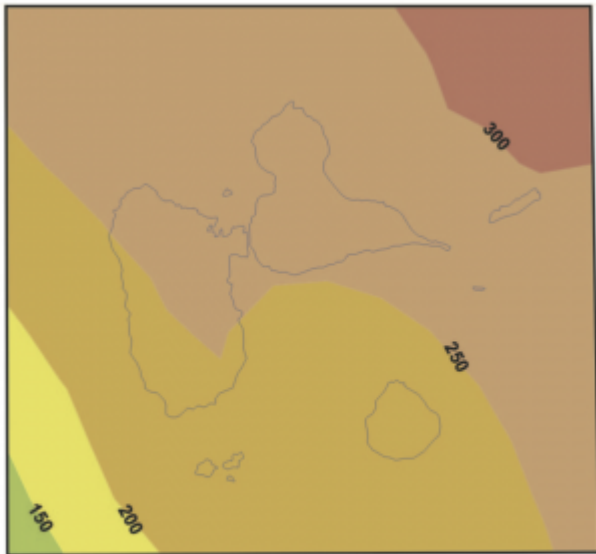

Accélération
cm/s²




OpenQuake - Guadeloupe - 10% in 50 years

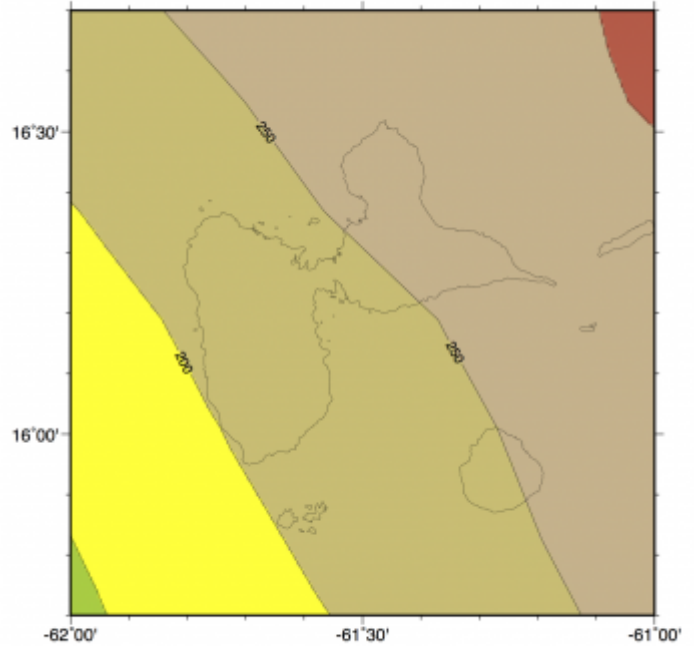


PGA (cm/s²)


Martinique

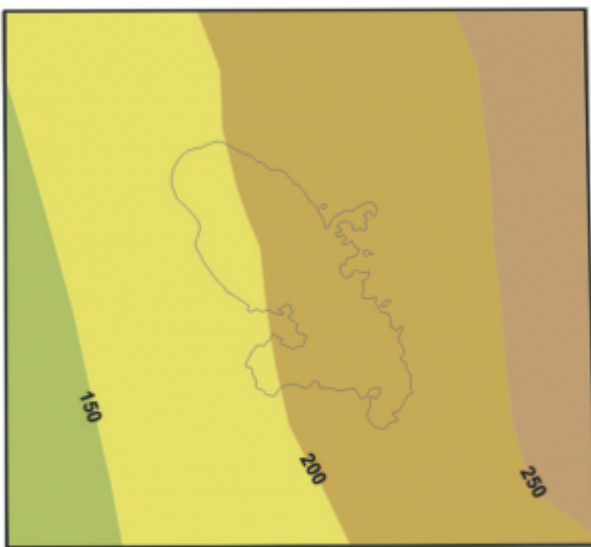

Accélération
cm/s²



OpenQuake - Martinique - 10% in 50 years

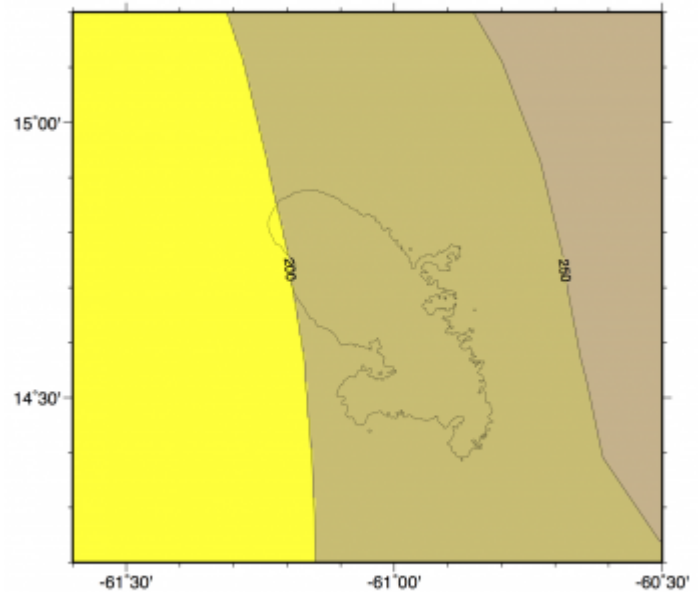

PGA (cm/s²)

References

- Feuillet N., Sismotectonique des Petites Antilles. Liaison entre activité sismique et volcanique, Thèse de doctorat de l'Université Paris 7, IPGP, 2000, 283 p.
- IPSN (1998). Proposition de modification de la Règle Fondamentale I.2.c. relative à la détermination des mouvements sismiques à prendre en compte pour la sûreté des tranches nucléaires comportant un réacteur à eau sous pression, applicables à l'ensemble des

installations nucléaires de base en surface. Rapport IPSN DES n° 348.

- Martin C., Combes P., Secanell R., Lignon G., Carbon, D., Fioravanti A., Grellet, B. (2002). Révision du zonage sismique de la France France: Etude probabiliste. Rapport GEO-TER n°GTR/MATE/07/01-150. [GEO-TER 2002 Report](#)
- Takahashi, T., Kobayashi, S., Fukushima, Y., Zhao, J.X., Nakamura, H., and Somerville, P.G. (2000). A spectral attenuation model for Japan using strong motion data base. In: Proceedings of the Sixth International Conference on Seismic Zonation.
- Youngs, R.R., Chiou, S.J., Silva, W.J., and Humphrey, J.R. (1997). Strong ground motion attenuation relation-ships for subduction zone earthquakes. Seismological Research Letters, 68(1), pp.58-73. [Journal website](#)
- Zhao, J. X., J. Zhang, A. Asano, Y. Ohno, T. Oouchi, T. Takahashi, H. Ogawa, K. Irikura, H. K. Thio, P. G. Somerville, Yasuhiro Fukushima, and Yoshimitsu Fukushima (2006). Attenuation relations of strong ground motion in Japan using site classification based on predominant period, Bull. Seismol. Soc. Am. Vol. 96, No. 3, pp.898-913. [Journal website](#)

Model Summary Table

This table summarises the main characteristics of the original implementation of this model

1	Datasets availability	
1.1	Earthquake catalogue	Not available
1.2	Geological database	
1.3	Strong-motion database	
1.4	Site characterization database	
<i>Notes</i>		
2	Methodology for model development	
2.1	Scientific participation (SSHAC levels) and review process	
2.2	Documentation describing model preparation	Available
2.3	Codes used for model preparation	Not available
<i>Notes</i>		
3	PSHA input model	
3.1	Seismic Source Model	
3.1.1	Area sources	Included
3.1.2	Grid sources	Not included
3.1.3	Crustal faults	Not included
3.1.4	Subduction faults	Included
3.1.5	Non-parametric ruptures	Not included
3.1.6	Magnitude-area scaling relationships	
3.2	Ground Motion Model	
3.2.0	Tectonic regionalisation	Not included, but the seismotectonic zonation follows Feulled (2000?)
3.2.1	Models for active shallow seismicity	Yes
3.2.2	Models for subduction interface	Yes

3.2.3	Models for subduction intraslab	Yes
3.2.4	Models for stable continental regions	No
3.2.5	Models for deep non-subduction sources	No
3.2.6	Models for volcanic areas	?????????
3.3	Site Response Model	
3.3.1	Based on GMPEs	Yes
3.3.2	Based on site-response analysis	
3.4	Epistemic uncertainties	
3.4.1	Seismic Source Model	Included, [explain]
3.4.2	Ground Motion Model	Included using a logic tree (see the ground motion model section)
3.4.3	Site Response Model	Not included
Notes		
4	Hazard Input Description	
4.1	Hazard input document	Available, [add link]
4.2	Input files	Not Available [explain]
Notes		
5	Calculation	
5.1	Software	Available upon request (CRISISv.7)
5.2	Results	
5.2.1	Hazard curves	Not directly available
5.2.2	Hazard maps	Not directly available
5.2.3	Uniform hazard spectra	Not directly available
5.2.4	Disaggregation	Not directly available
5.2.5	Stochastic event sets	Not considered
5.2.6	Ground motion fields	Not considered
Notes		
6	Download oq-engine input model (NRML format) - Please read the license and disclaimer attached to the model	
Link	Not available	

Download The OpenQuake-engine Input Model

The OpenQuake-engine input model (NRML format) can be downloaded at the link provided below - Please read the license and disclaimer attached to the model.

link | [Download](#)]]

From: <https://hazardwiki.openquake.org/> - **GEM Hazard Team Wiki**

Permanent link: https://hazardwiki.openquake.org/geoter2002_intro?rev=1421060551

Last update: **2015/01/12 12:02**



